


Pro-Jet Fan 30L Series

Features

- Low Noise by a Long Inlet and Outlet Silencer
- Compact Design to Easily Install in Parking Area or Building
- Light Weight by Using Aluminum in Stator and Nozzle

PFS-30L, PFH-30L, PFV-30L



Dimensions

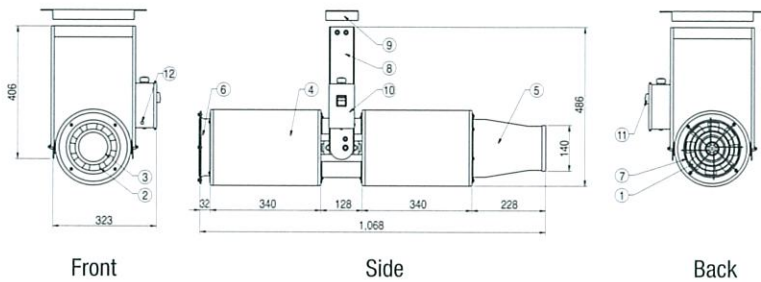



Material Table

- | | |
|--------------|---------------------|
| ① Impeller | ⑦ Screen |
| ② Fan Case | ⑧ Side Bracket |
| ③ Motor | ⑨ Anchor Bracket |
| ④ Silencer | ⑩ Terminal Box |
| ⑤ Nozzle | ⑪ Circuit Protector |
| ⑥ Bell Mouth | ⑫ Operation Lamp |

Air Distributions

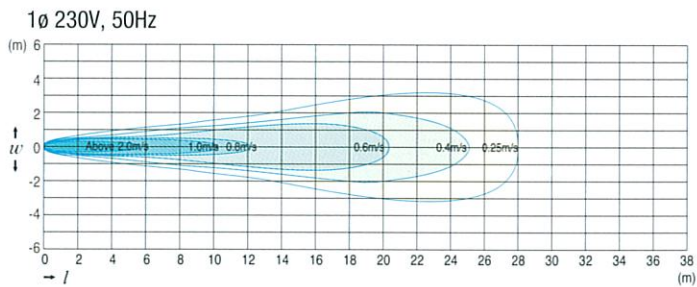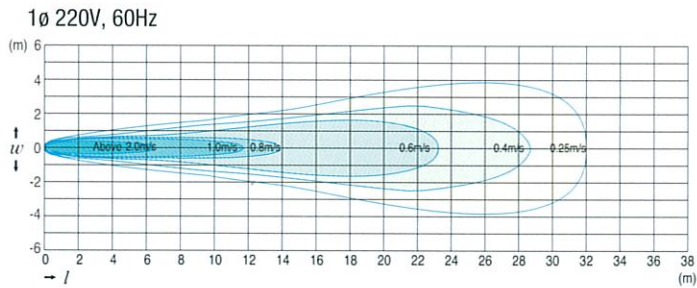

Performance Curves

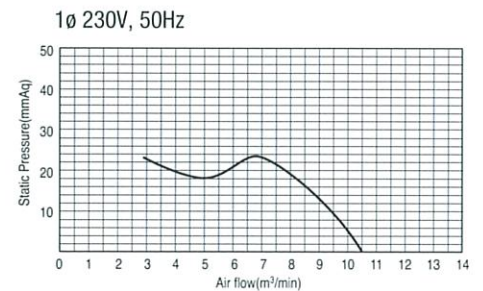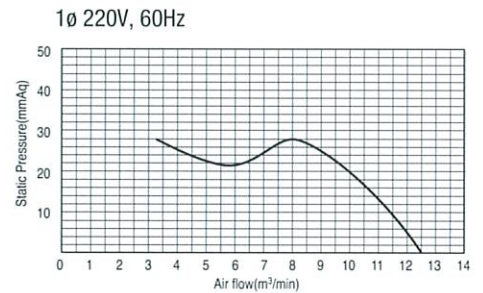

Specifications

Model Name		PFS-30L (Constant Air Flow)		PFH-30L (High Temperature, 250°C, 2hrs)		PFV-30L (Variable Air Flow)	
		1ø 220V, 60Hz	1ø 230V, 50Hz	1ø 220V, 60Hz	1ø 230V, 50Hz	1ø 220V, 60Hz	1ø 230V, 50Hz
Rated Power	V, Hz	1ø 220V, 60Hz	1ø 230V, 50Hz	1ø 220V, 60Hz	1ø 230V, 50Hz	1ø 220V, 60Hz	1ø 230V, 50Hz
Air Flow Rate	CMM	12.5	10.5	12.5	10.5	8.3~18.1	
Outlet Velocity	m/s	13.5	11.4	13.5	11.4	9.0~19.6	
Maximum Throw	m	32	28	32	28	38	
Power Consumption	W	170	150	170	150	380	
Fan Output	W	120	90	120	90	290	
Sound Level	dB(A)	53.2	52.3	53.2	52.3	57.5	
Rotation Speed	rpm	3,450	2,900	3,450	2,900	2,300~5,000	
Weight	kg	16.5	16.5	16.5	16.5	17.2	